FENDER "TWIN-AMP" LAYOUT
MODEL 5F8

F-EG

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER VALUES SHOWN + OR - 20%

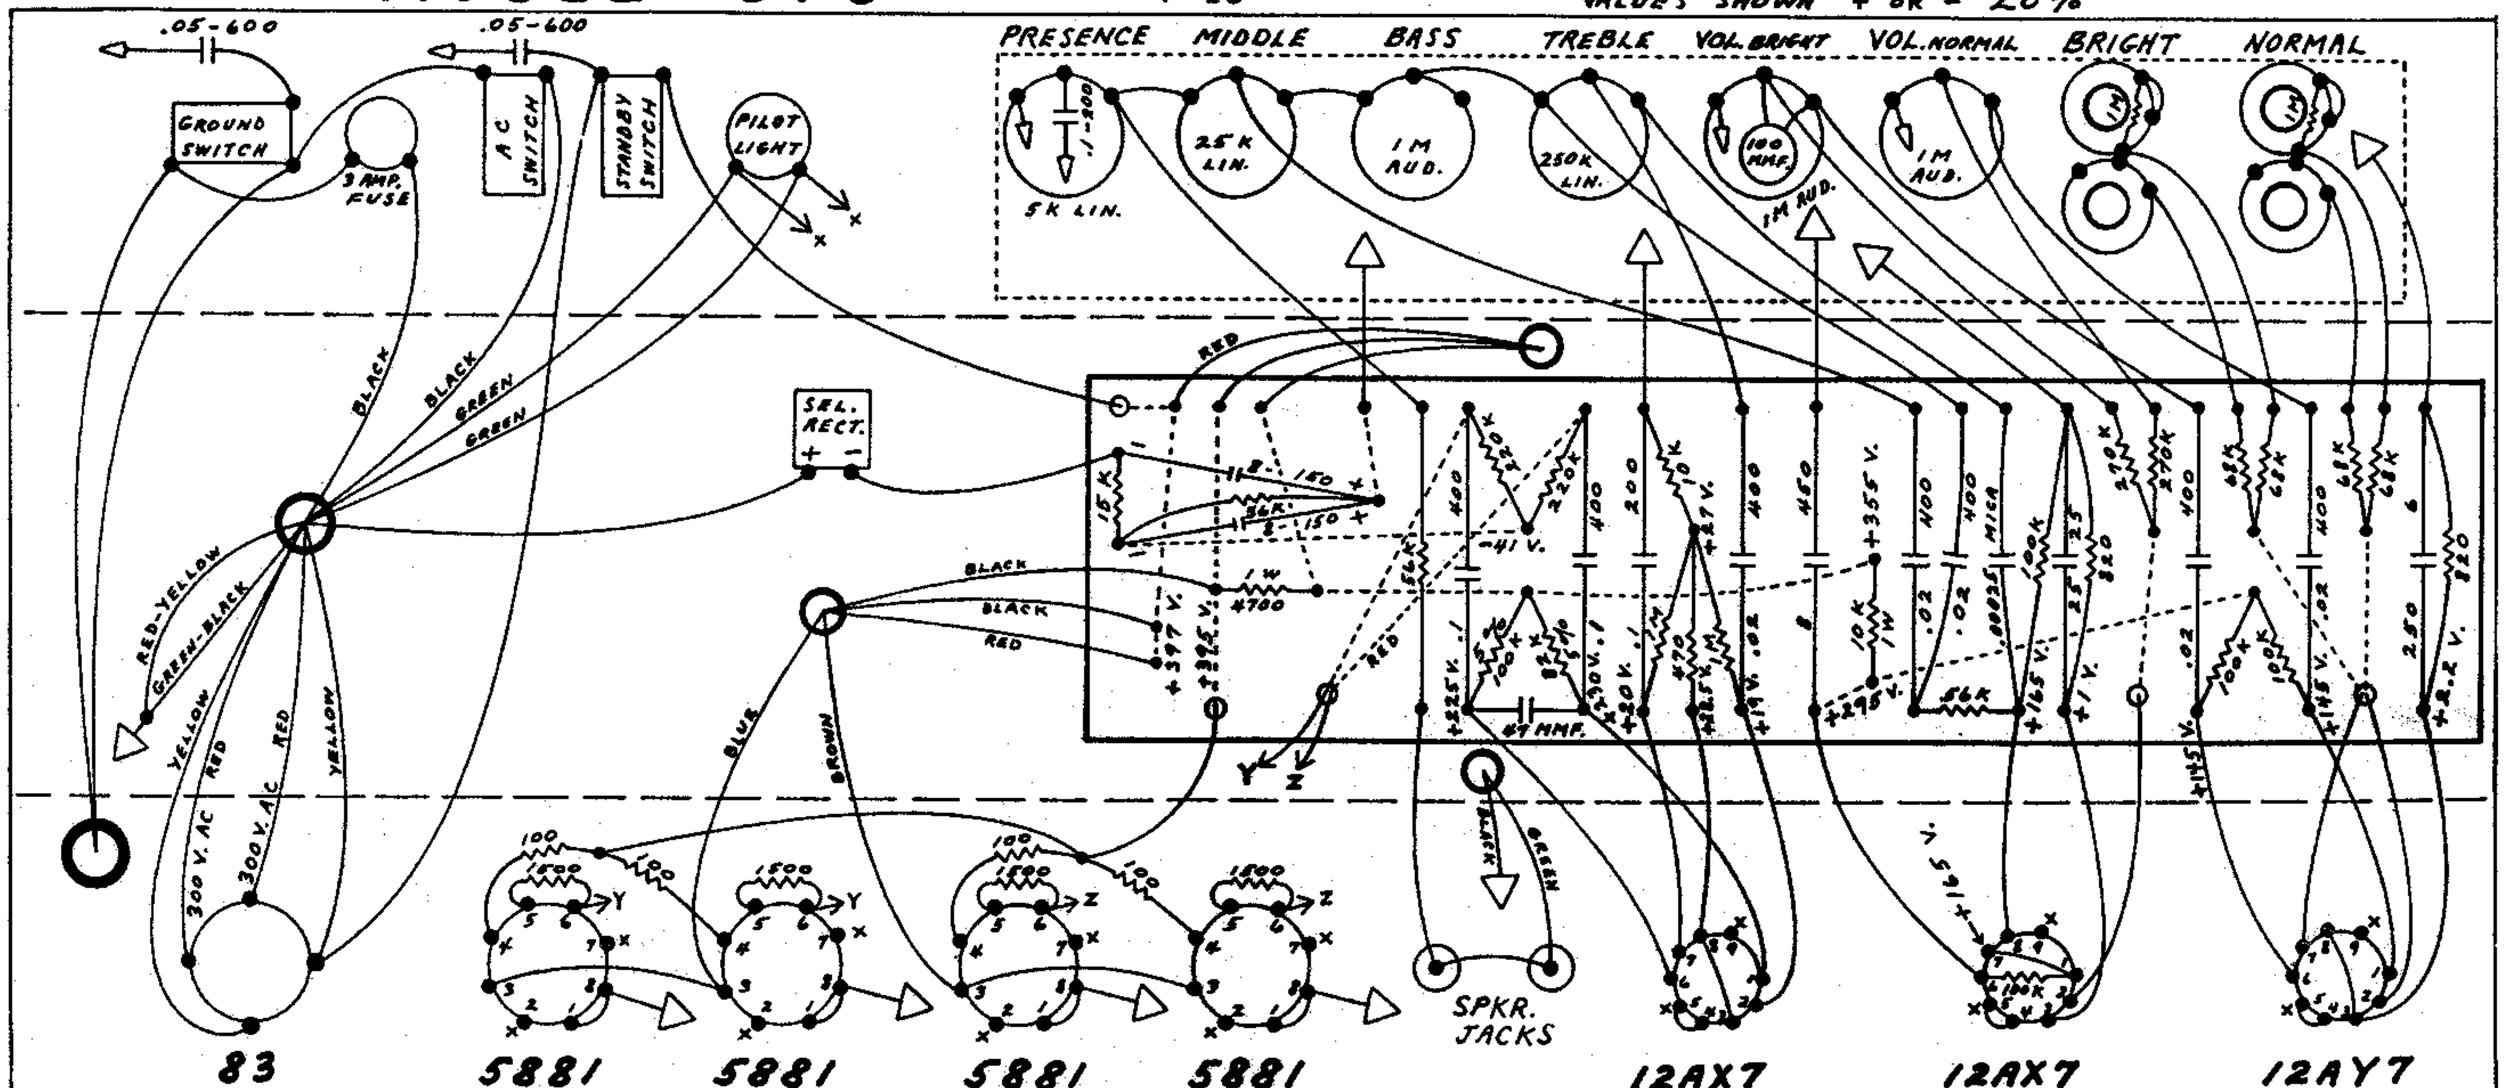
.05-600
.05-600
GROUND SWITCH
3 AMP. FUSE
A C SWITCH
STANDBY SWITCH
PILOT LIGHT
PRESENCE
MIDDLE
BASS
TREBLE
VOL. BRIGHT
VOL. NORMAL
BRIGHT
NORMAL
5K LIN.
25K LIN.
1M AUD.
250K LIN.
100 MMF.
1M AUD.
1M AUD.
SEL. RECT.
BLACK
BLACK
GREEN
GREEN
RED-YELLOW
GREEN-BLACK
YELLOW
RED
300 V. AC
300 V. AC
RED
YELLOW
RED
BLACK
BLACK
RED
BLUE
BROWN
15K
1W #700
56K
.1
.02
.02
.02