



ALL RESISTORS 1/4W UNLESS STATED. ALL CAPACITORS 50V AXIAL 2 MICROFARAD UNLESS STATED.

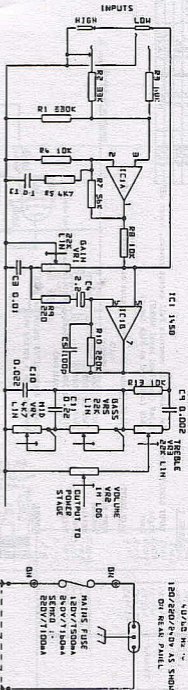

POWER INPUT
4.0/5.0 Hz
120/250/250V AS SHOWN
ON REAR PANEL

VOLTAGES TYPICAL NO SIGNAL CONDITION 250V INPUT

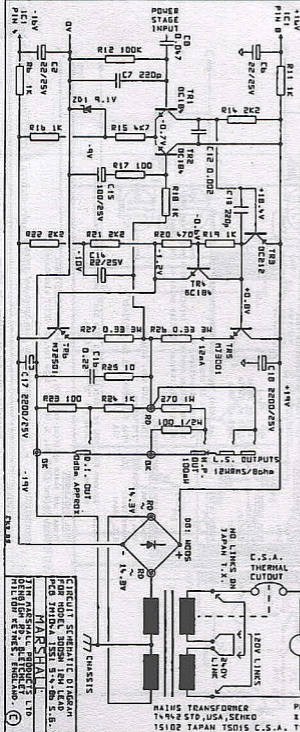

POWER INPUT
4.0/5.0 Hz
120/250/250V AS SHOWN
ON REAR PANEL

MAIN TRANSFORMER
TANAS 570, USA, SENKO
15102 TAPAN 15015 C.S.A. TYPE DEPENDANT ON COUNTRY

POWER INPUT
4.0/5.0 Hz
120/250/250V AS SHOWN
ON REAR PANEL

POWER INPUT
4.0/5.0 Hz
120/250/250V AS SHOWN
ON REAR PANEL

CIRCUIT SCHEMATIC DIAGRAM
FOR MODEL 3000 1PM LEAD
PCB JH10A 1S1 5-4-85 S.B.

MARSHALL

THE MARSHALL PRODUCTS LTD
DENLIGH RD, BLETCHLEY
MILTON KEYNES, ENGLAND